

AIR SPACERS



HYGRADE METAL MOULDING MANUFACTURING CORP.


1990 Highland Ave., Bethlehem, PA 18018

Tel: 610-866-2441 • Fax: 610-866-3761

Toll Free: (800)645-9475

Standard Laser-Welded Air Spacer

The original air spacer that has performed successfully in I.G. units since 1981.

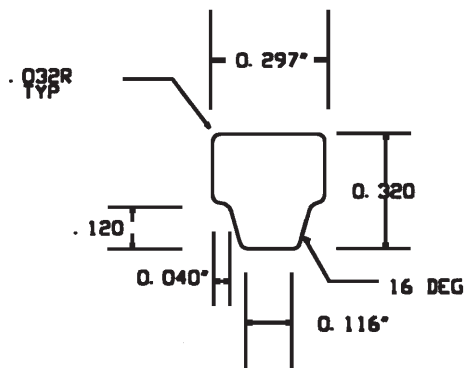

Part #	Fractional Size	A Inch	B Inch
W188	3/16	0.188	0.070
W219	7/32	0.219	0.070
W235	15/64	0.235	0.075
W250	1/4	0.250	0.100
W281	9/32	0.281	0.110
W297	19/64	0.297	0.115
W312	5/16	0.312	0.130
W344	11/32	0.344	0.145
W360	23/64	0.360	0.160
W375	3/8	0.375	0.175
W406	13/32	0.406	0.200
W438	7/16	0.438	0.212
W469	15/32	0.469	0.230
W485	31/64	0.485	0.275
W500	1/2	0.500	0.300
W520		0.520	0.320
W531	17/32	0.531	0.330
W548	35/64	0.548	0.335
W563	9/16	0.563	0.340
W594	19/32	0.594	0.370
W610	39/64	0.610	0.385
W625	5/8	0.625	0.400
W656	21/32	0.656	0.450
W688	11/16	0.688	0.500
W719	23/32	0.719	0.530
W750	3/4	0.750	0.575
W781	25/32	0.781	0.580
W812	13/16	0.812	0.585
W875	7/8	0.875	0.650
W1000	1	1.000	0.775
W1312	1 5/16	1.312	1.080

Notes:

- All sizes are available in: Clear, Dark Bronze, Light Bronze, Black, Gold Anodized and Mill Finish Aluminum. Nizin plate, galvanized and stainless steel are available on request.
- Standard spacer length is 12'8" or 13'. Other lengths are available on a custom basis from 5" to 25'. Any custom length less than 12" will be charged as 12".
- Imprinting on spacer is available at no extra charge
- Spacer is available with a solid weld and perforated top for bending.
- When ordering please specify if spacer is to be used for bending.
- Other air space sizes are available on a custom basis.
- Minimum amounts may apply on imprinted spacer and custom length spacer.

